

PARTS LIST FOR SANSUI SPEAKER SYSTEM

SP-X8700
SP-8300


Ref No. USP-24

SP-X8700/SP-8300

SANSUI ELECTRIC CO., LTD.
14-1, Izumi 2-Chome, Suginami-ku, Tokyo 168 Japan
TELEPHONE (03) 323-1111/TELEX. 232-2076

Sansui


Front View

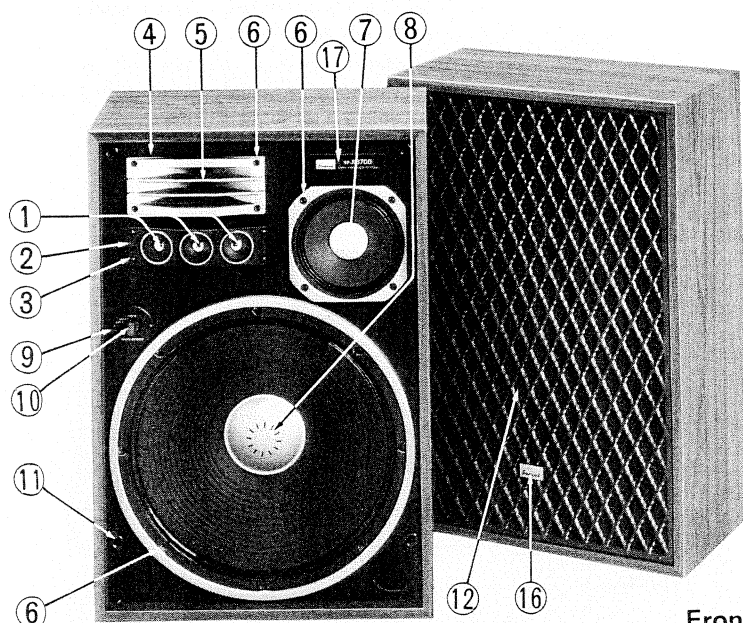

Parts List <Front View>


Parts No.	Stock No.	Description
1	4430830	T-167, Super Tweeter
2	5054110	Dress Cover for super tweeter
3	5162620	Screw, 3 x 16 mm
4	4430860	T-149C, Tweeter
5	5054120	Horn Lens
6	5109904	Screw, 4 x 30 mm
7	4420600	S-148, Midrange Speaker
8	4411190	W-195, Woofer
9	5384420	Control Indicator
10	5314080	Knob
11	5294230	Latch
12	7180650	Front Grille Ass'y (SP-X8700)
	7180690	Front Grille Ass'y (SP-8300)
13	5294060	Support
14	5294220	Strike
15	5143818	Screw, 2.7 x 13 mm
16	5334540	Sansui Badge
17	5384430	Naming Plate (SP-X8700)
	5384500	Naming Plate (SP-8300)

Front Grille Ass'y




Parts List <Packings>

Parts No.	Stock No.	Description
1	9024670	Corner Packing (ea.)
2	9115080	Vinyl Bag
3	9003794	Carton Case (SP-X8700)
	9003852	Carton Case (SP-8300)
Attachments		
	3834140	Speaker Cord
	9205080	Operating Instructions (SP-X8700)
	9205270	Operating Instructions (SP-8300)

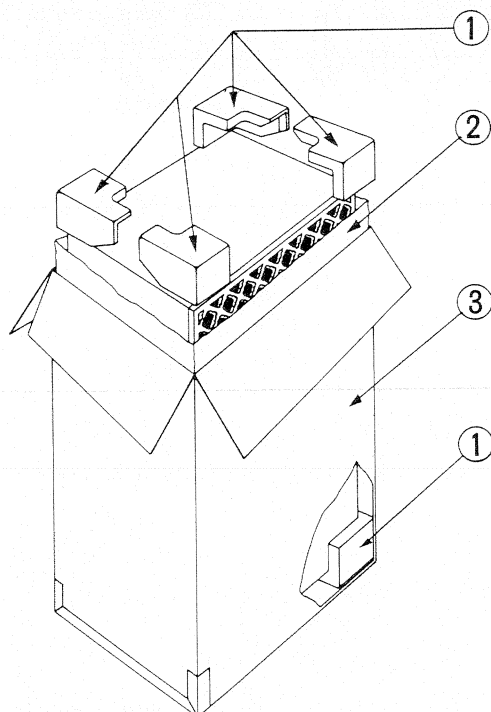

Crossover Network

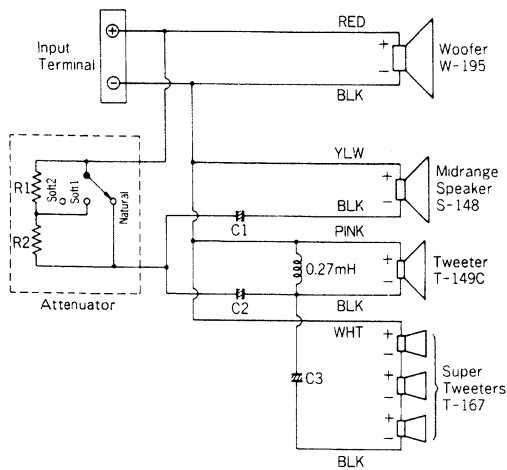

Parts List <Crossover Network>

Parts No.	Stock No.	Description
C1	0529533	15μF 50V BP.E.C.
C2	0529524	2.2μF 50V BP.E.C.
C3	0601338	0.33μF 50V M.C.
	1090520	Attenuator
	2290210	(with resistors, R1 & R2) Input Terminal

BP.E.C.: Bi-polar Electrolytic Capacitor.
M.C.: Mylar Capacitor


Note: The completed crossover network will not be supplied; however, each part shown in Part List above is provided to your orders.

Specifications

Speakers

Woofer	432 mm (17") Cone-type
Midrange	165 mm (6-1/2") Cone-type
Tweeter	171 x 59 mm (6-11/16" x 2-5/16") Horn-type
Supertweeter	49 mm (1-15/16") x 3 Cone-type
Maximum input power	220 watts
Impedance	8 ohms
Sensitivity	99 dB/W (at 1m)
Frequency range	45 to 23,000 Hz (in anechoic chamber) 22 to 23,000 Hz (in normal listening room)
Crossover frequencies	1,000 Hz, 6,000 Hz, 10,000 Hz
Enclosure	Bass reflex type Walnut grain vinyl finish
Dimensions	470 mm (18-1/2") W 688 mm (27-1/16") H 270 mm (10-5/8") D
Weight	19.3 kg (42.5 lbs) net 21.5 kg (47.4 lbs) packed

Design and specifications subject to change without notice for improvements.

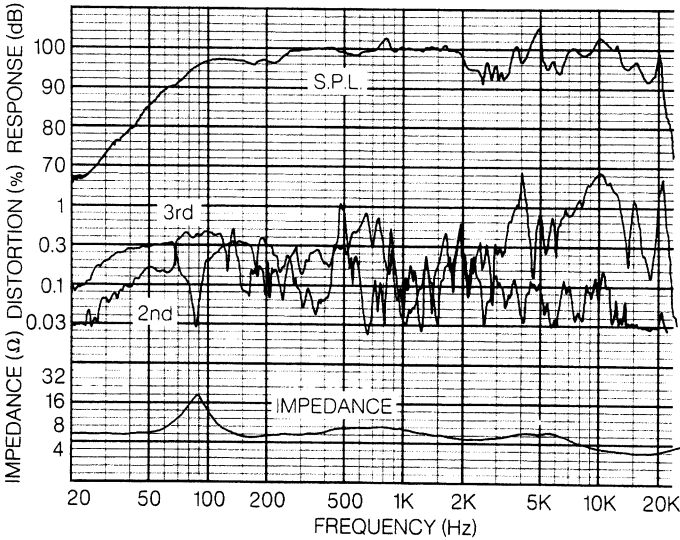

MEMO

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....